


## Clean air...it's what we do

### Specifications

Frame: 16 ga galvaneal or 0.063" aluminum  
 Media: Continuous corrugated wet laid microglass paper  
 Efficiency: 99.97%, per IEST-RP-CC-001.3-A, MERV 17 per ASHRAE  
 Frame Style: Box, single header, double header  
 Pack Sealant: High temperature urethane  
 Gasketing: Neoprene  
 Gasket Location: Upstream, downstream, both sides  
 Pack Style: Corrugated aluminum or seperatorsless dimples  
 UL 900: Class 1 or Class 2

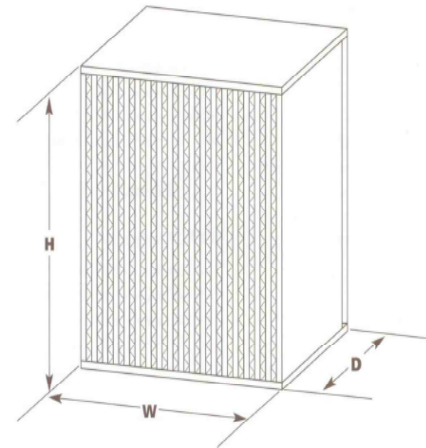

### 99.97% HEPA Filter, Standard Capacity

Model Number	Actual Dimensions			CFM Capacity @ __"w.g.			Weight (lbs.)
	H"	W"	D"	0.65	1.0	1.35	
*AFH-12-12-11 1/2 SC	12	12	11-1/2	135	205	265	15
*AFH-24-12-11 1/2 SC	24	12	11-1/2	300	455	590	26
*AFH-24-24-11 1/2 SC	24	24	11-1/2	650	1000	1300	38
*AFH-12-12-5 7/8 SC	12	12	5-7/8	70	105	135	9
*AFH-24-12-5 7/8 SC	24	12	5-7/8	145	225	295	12
*AFH-24-24-5 7/8 SC	24	24	5-7/8	325	500	650	20

\*Model Number Designation Sheet must be filled out to show complete description.

#### Notes:

1. Model Number Designation Sheet must be filled out to provide complete description.
2. Contact Air Scrubbers for special size or options information.
3. Tolerance: H X W = + 0" / - 1/8"; D = + 1/16 / - 0"
4. Maximum temperature exposure 250°F



PO Box 2205      Ph: 919-718-5818  
 Sanford, NC 27331      Fax: 919-718-5819  
 info@airscrubbersinc.com

99.97%  
 HEPA Filter, Standard Capacity

Date  
 01/02/10

Revision

Model

**AFH-SC**