


# Clean air...it's what we do

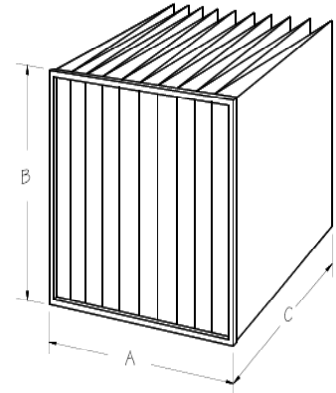

## Specifications

Media: 100% Synthetic Polypropylene Microfiber  
 Pockets: Ultrasonically Welded Seams & Edges  
 Pocket Flutes: Ultrasonically Welded Support Spacers  
 Header: Electro-Galvanized Metal Header and "J" Style Media Retainers  
 Gasket Location: Upstream, downstream, both sides  
 Efficiency: 50-55% per ASHRAE 52.1; MERV 10 per ASHRAE 52.2  
 UL 900: Class 2 (standard)

### Bag 50% - 10 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance (w.g.)
AFB1050S-4430	23-3/8"	23-3/8"	30"	10	2500	.19
AFB1050S-4426	23-3/8"	23-3/8"	26"	10	1875	.19
AFB1050S-4422	23-3/8"	23-3/8"	22"	10	1875	.19
AFB1050S-4415	23-3/8"	23-3/8"	15"	10	1250	.19
AFB850S-0430	19-3/8"	23-3/8"	30"	8	2000	.19
AFB850S-0426	19-3/8"	23-3/8"	26"	8	1500	.19
AFB850S-0422	19-3/8"	23-3/8"	22"	8	1500	.19
AFB850S-0415	19-3/8"	23-3/8"	15"	8	1000	.19
AFB550S-2430	11-3/8"	23-3/8"	30"	5	1250	.19
AFB550S-2426	11-3/8"	23-3/8"	26"	5	950	.19
AFB550S-2422	11-3/8"	23-3/8"	22"	5	950	.19
AFB550S-2415	11-3/8"	23-3/8"	15"	5	625	.19

### Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AFB1050S-4430-GU-1



PO Box 2205 Ph: 919-718-5818  
 Sanford, NC 27331 Fax: 919-718-5819  
 info@airscrubbersinc.com

Bag 50%, MERV 10,  
 10 Pocket

Date  
 01/02/10

Revision

Model

**AFB1050S**