


Clean air...it's what we do

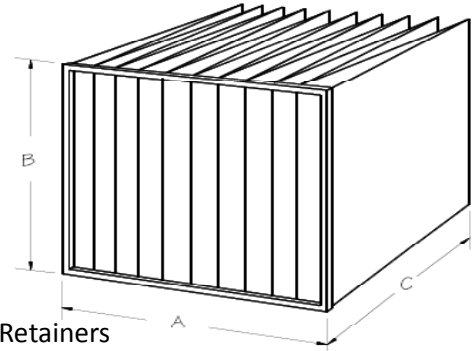

Specifications

Media: 100% Synthetic Polypropylene Microfiber
 Pockets: Ultrasonically Welded Seams & Edges
 Pocket Flutes: Ultrasonically Welded Support Spacers
 Header: Electro-Galvanized Metal Header and "J" Style Media Retainers
 Gasket Location: Upstream, downstream, both sides
 Efficiency: 60-65% per ASHRAE 52.1; MERV 11 per ASHRAE 52.2
 UL 900: Class 2 (standard)

Bag 65% - 10 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance (w.g.)
AFB1065S-4430	23-3/8"	23-3/8"	30"	10	2500	.19
AFB1065S-4426	23-3/8"	23-3/8"	26"	10	1875	.19
AFB1065S-4422	23-3/8"	23-3/8"	22"	10	1875	.19
AFB1065S-4415	23-3/8"	23-3/8"	15"	10	1250	.19
AFB865S-0430	19-3/8"	23-3/8"	30"	8	2000	.19
AFB865S-0426	19-3/8"	23-3/8"	26"	8	1500	.19
AFB865S-0422	19-3/8"	23-3/8"	22"	8	1500	.19
AFB865S-0415	19-3/8"	23-3/8"	15"	8	1000	.19
AFB565S-2430	11-3/8"	23-3/8"	30"	5	1250	.19
AFB565S-2426	11-3/8"	23-3/8"	26"	5	950	.19
AFB565S-2422	11-3/8"	23-3/8"	22"	5	950	.19
AFB565S-2415	11-3/8"	23-3/8"	15"	5	625	.19

Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AFB1065S-4430-GU-1



PO Box 2205 Ph: 919-718-5818
 Sanford, NC 27331 Fax: 919-718-5819
 info@airscrubbersinc.com

Bag 65%, MERV 11,
 10 Pocket

Date 01/02/10	Model AFB1065S
Revision	