


Clean air...it's what we do

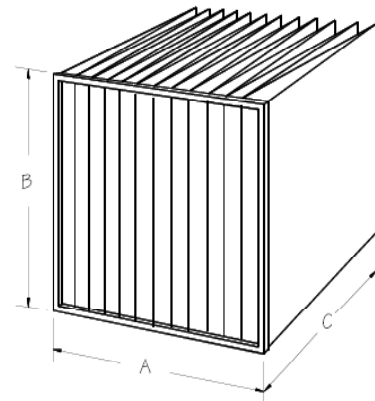

Specifications

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

Gasket Location: Upstream, downstream, both sides

Efficiency: 50-55% per ASHRAE 52.1; MERV 10 per ASHRAE 52.2

UL 900: Class 1 or 2

Bag 50% - 12 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance (w.g.)
AFB1250S-4415	23-3/8"	23-3/8"	15"	12	1500	.16
AFB1050S-0415	19-3/8"	23-3/8"	15"	10	1250	.16
AFB1050S-0015	19-3/8"	19-3/8"	15"	10	1000	.16
AFB650S-2415	11-3/8"	23-3/8"	15"	6	750	.16

Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class I, 2 UL 900, Class 2

Example with options is AFB1250S-4430-GU-1



PO Box 2205 Ph: 919-718-5818
Sanford, NC 27331 Fax: 919-718-5819
info@airscrubbersinc.com

Bag 50%, MERV 10,
12 Pocket

Date
01/02/10

Revision

Model

AFB1250S