


Clean air...it's what we do

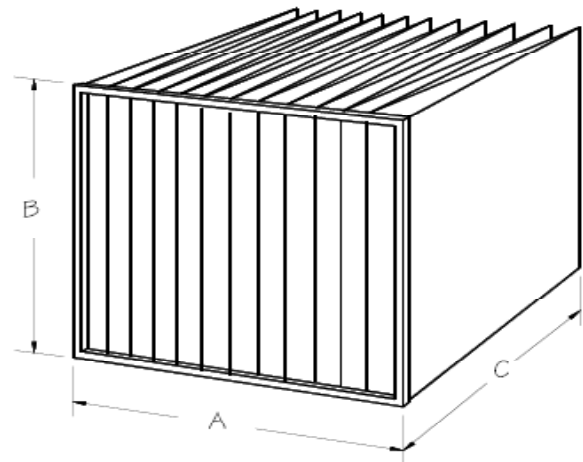

Specifications

Media: 100% Synthetic Polypropylene Microfiber
 Pockets: Ultrasonically Welded Seams & Edges
 Pocket Flutes: Ultrasonically Welded Support Spacers
 Header: Electro-Galvanized Metal Header and "J" Style Media Retainers
 Gasket Location: Upstream, downstream, both sides
 Efficiency: 80-85% per ASHRAE 52.1; MERV 13 per ASHRAE 52.2
 UL 900: Class 2 (standard)

Bag 85% - 12 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance (w.g.)
AFB1285S-4415	23-3/8"	23-3/8"	15"	12	2000	.44
AFB1085S-0415	19-3/8"	23-3/8"	15"	10	1750	.44
AFB1085S-0015	19-3/8"	19-3/8"	15"	10	1500	.44
AFB685S-2415	11-3/8"	23-3/8"	15"	6	1250	.44

Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AFB1285S-4430-GU-1



PO Box 2205 Ph: 919-718-5818
 Sanford, NC 27331 Fax: 919-718-5819
 info@airscrubbersinc.com

Bag 85%, MERV 13,
 12 Pocket

Date
 01/02/10

Revision

Model

AFB1285S