


# Clean air...it's what we do

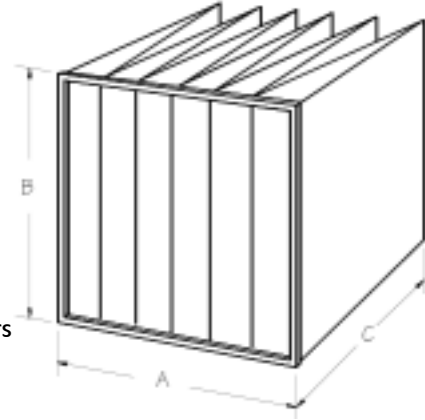

## Specifications

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

Gasket Location: Upstream, downstream, both sides

Efficiency: 50-55% per ASHRAE 52.1; MERV 10 per ASHRAE 52.2

UL 900: Class 2 (standard)

### Bag 50% - 6 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance (w.g.)
AFB650S-4430	23-3/8"	23-3/8"	30"	6	1500	.21
AFB650S-4426	23-3/8"	23-3/8"	26"	6	1500	.22
AFB650S-4422	23-3/8"	23-3/8"	22"	6	1250	.21
AFB650S-4415	23-3/8"	23-3/8"	15"	6	750	.21
AFB550S-0430	19-3/8"	23-3/8"	30"	5	1250	.21
AFB550S-0426	19-3/8"	23-3/8"	26"	5	1250	.22
AFB550S-0422	19-3/8"	23-3/8"	22"	5	1050	.21
AFB550S-0415	19-3/8"	23-3/8"	15"	5	625	.21
AFB350S-2430	11-3/8"	23-3/8"	30"	3	750	.21
AFB350S-2426	11-3/8"	23-3/8"	26"	3	750	.22
AFB350S-2422	11-3/8"	23-3/8"	22"	3	625	.21
AFB350S-2415	11-3/8"	23-3/8"	15"	3	375	.21

### Options:

- GU Gasket Upstream
- GD Gasket downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AFB650S-4430-GU-1



PO Box 2205 Ph: 919-718-5818  
 Sanford, NC 27331 Fax: 919-718-5819  
 info@airscrubbersinc.com

**Bag 50%, MERV 10,  
6 Pocket**

Date  
01/02/10

Revision

Model

**AFB650S**