


Clean air...it's what we do

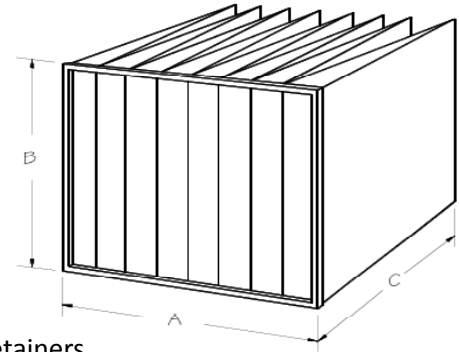

Specifications

Media: 100% Synthetic Polypropylene Microfiber
 Pockets: Ultrasonically Welded Seams & Edges
 Pocket Flutes: Ultrasonically Welded Support Spacers
 Header: Electro-Galvanized Metal Header and "J" Style Media Retainers
 Gasket Location: Upstream, downstream, both sides
 Efficiency: 60-65% per ASHRAE 52.1; MERV 11 per ASHRAE 52.2
 UL 900: Class 2 (standard)

Bag 65% - 8 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance (w.g.)
AFB865S-4430	23-3/8"	23-3/8"	30"	8	2000	.17
AFB865S-4426	23-3/8"	23-3/8"	26"	8	1500	.18
AFB865S-4422	23-3/8"	23-3/8"	22"	8	1500	.12
AFB865S-4415	23-3/8"	23-3/8"	15"	8	1000	.19
AFB665S-0430	19-3/8"	23-3/8"	30"	6	1500	.19
AFB665S-0426	19-3/8"	23-3/8"	26"	6	1125	.18
AFB665S-0422	19-3/8"	23-3/8"	22"	6	1125	.19
AFB665S-0415	19-3/8"	23-3/8"	15"	6	750	.19
AFB465S-2430	11-3/8"	23-3/8"	30"	4	1000	.19
AFB465S-2426	11-3/8"	23-3/8"	26"	4	750	.18
AFB465S-2422	11-3/8"	23-3/8"	22"	4	750	.19
AFB465S-2415	11-3/8"	23-3/8"	15"	4	500	.19

Options:

- GU Gasket Upstream
 - GD Gasket Downstream
 - GS Gasket Sides
 - 1 UL 900, Class 1
- Example with options is AFB865S-4430-GU-1



PO Box 2205 Ph: 919-718-5818
 Sanford, NC 27331 Fax: 919-718-5819
 info@airscrubbersinc.com

Bag 65%, MERV 11,
 8 Pocket

Date
 01/02/10

Model

Revision

AFB865S