


Clean air...it's what we do

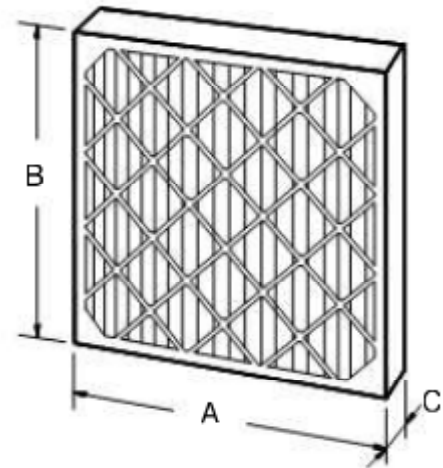

Specifications

Frame: 26 point high wet strength clay-coated kraft board.

Media: 100% synthetic fibers, water and bacteria resistant.

Media bonded to frame using water resistant adhesive.


Media bonded to expanded metal support grid using water resistant adhesive.

Efficiency: 25-30% per ASHRAE 52.1; MERV 7-8 per ASHRAE 52.2

UL 900: Class 2

Pleat - 2" Nominal Depth, Economy Capacity

Model Number	Width "A"	Height "B"	Depth "C"
AFP1000-5502	24-1/2"	24-1/2"	1-3/4"
AFP1000-4402	23-3/8"	23-3/8"	1-3/4"
AFP1000-0502	19-1/2"	24-1/2"	1-3/4"
AFP1000-0402	19-1/2"	23-3/8"	1-3/4"
AFP1000-0002	19-1/2"	19-1/2"	1-3/4"
AFP1000-8502	17-3/8"	24-1/2"	1-3/4"
AFP1000-8402	17-3/8"	23-3/8"	1-3/4"
APF1000-6502	15-1/2"	24-1/2"	1-3/4"
AFP1000-6002	15-1/2"	19-1/2"	1-3/4"
AFP1000-2402	11-3/8"	23-3/8"	1-3/4"
AFP1000-2002	11-3/8"	19-1/2"	1-3/4"

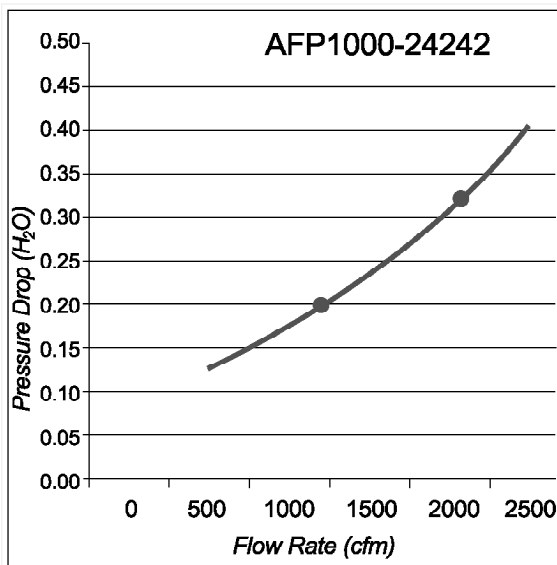

PO Box 2205 Ph: 919-718-5818
 Sanford, NC 27331 Fax: 919-718-5819
 info@airscrubbersinc.com

**Pleated Filter, 2" Nominal Depth
 Economy Capacity, 25-30%
 MERV 7-8**

Date 01/02/10

Model

Revision

AFP1000-2