


Clean air...it's what we do

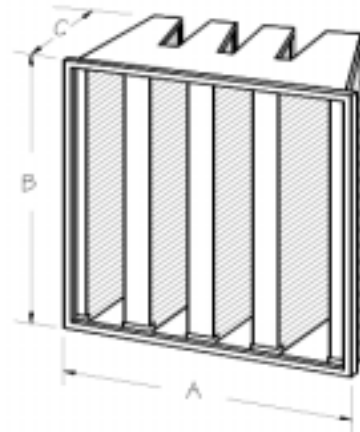

Specifications

Media: Synthetic Polypropylene Microfiber.
 Continuous polypropylene spacer beads thermally bonded to both sides of media.
 Frame: 100% polymer, no metal components.
 Frame to media adhesive: Solid, water-resistant adhesive.
 Frame Style: Single header
 Efficiency: 60-65% per ASHRAE 52.1; MERV 11 per ASHRAE 52.2
 UL 900; Class 2 (standard)


V 65% - MERV 11

Model Number	Width "A"	Height "B"	Depth "C"
AFV65-4412	23-3/8"	23-3/8"	11-1/2"
AFV65-4212	23-3/8"	11-3/8"	11-1/2"
AFV65-4012	23-3/8"	19-3/8"	11-1/2"

Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AFV65-4412-GU-1

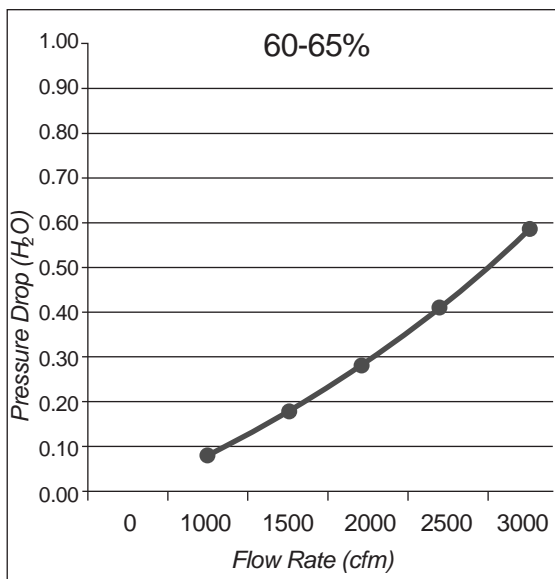

PO Box 2205 Ph: 919-718-5818
 Sanford, NC 27331 Fax: 919-718-5819
 info@airscrubbersinc.com

V 65%, MERV 11

Date
01/02/10

Model

Revision

AFV65