


Clean air...it's what we do

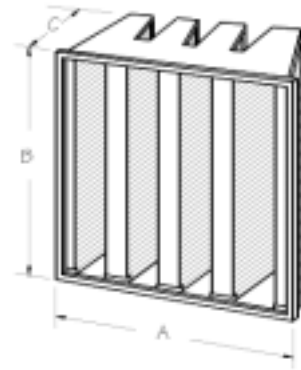

Specifications

Media: Synthetic Polypropylene Microfiber.

Continuous polypropylene spacer beads thermally bonded to both sides of media.

Frame: 100% polymer, no metal components.

Frame to media adhesive: Solid, water-resistant adhesive.


Frame Style: Single header

Efficiency: 98% per ASHRAE 52.1; MERV 15 per ASHRAE 52.2

UL 900; Class 2 (standard)

V 98% - MERV 15

Model Number	Width "A"	Height "B"	Depth "C"
AFV98-4412	23-3/8"	23-3/8"	11-1/2"
AFV98-4212	23-3/8"	11-3/8"	11-1/2"
AFV98-4012	23-3/8"	19-3/8"	11-1/2"

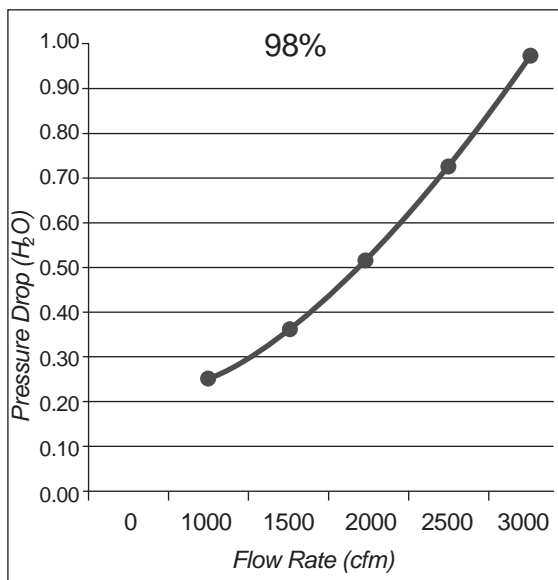

Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AFV98-4412-GU-1



PO Box 2205 Ph: 919-718-5818
Sanford, NC 27331 Fax: 919-718-5819
info@airscrubbersinc.com

V 98%, MERV 15

Date
01/02/10

Model

Revision

AFV98