


*Clean air...it's what we do*

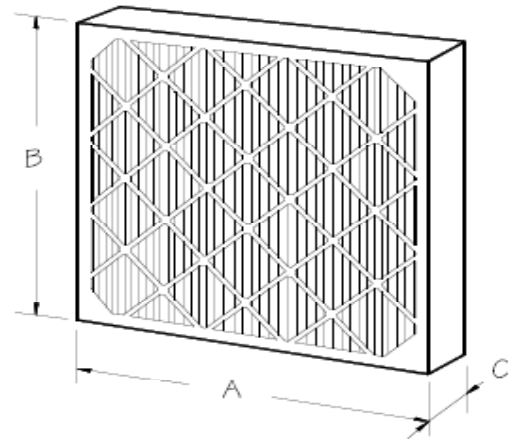

Specifications

Frame: 100% polypropylene plastic board.

Media: 100% polypropylene fibers, water and bacteria resistant.

Media is spaced and supported with beads of polypropylene polymer.

Media bonded to frame using polypropylene adhesive.


Efficiency: 60-65% per ASHRAE 52.1; MERV 11 per ASHRAE 52.2

UL 900: Class 2

Mini Pleat - 4" Nominal Depth, 60%-65%, MERV 11-12

Model Number	Width "A"	Height "B"	Depth "C"
AFMP65-24244-**	23-3/8"	23-3/8"	3-3/4"
AFMP65-20242-**	19-1/2"	24-1/2"	3-3/4"
AFMP65-20244-**	19-1/2"	23-3/8"	3-3/4"
AFMP65-20204-**	19-1/2"	19-1/2"	3-3/4"
AFMP65-16254-**	15-1/2"	24-1/2"	3-3/4"
AFMP65-16204-**	15-1/2"	19-1/2"	3-3/4"
AFMP65-12244-**	11-3/8"	23-3/8"	3-3/4"

\*\*Insert DF for die cut frame or PF for polypropylene frame

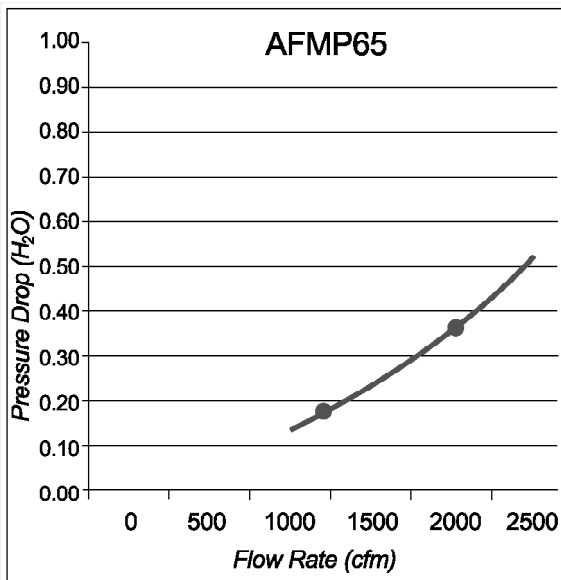

PO Box 2205 Ph: 919-718-5818  
 Sanford, NC 27331 Fax: 919-718-5819  
 info@airscrubbersinc.com

**Mini Pleat, 4" Nominal Depth  
 60%-65% MERV 11-12**

Date 01/02/10

Model

Revision

**AFMP65-4**